
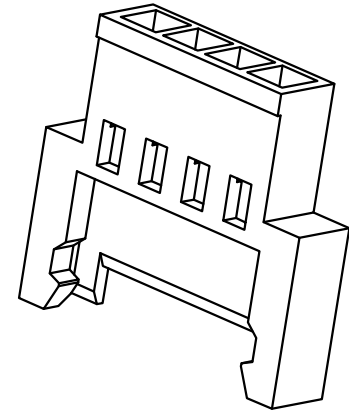
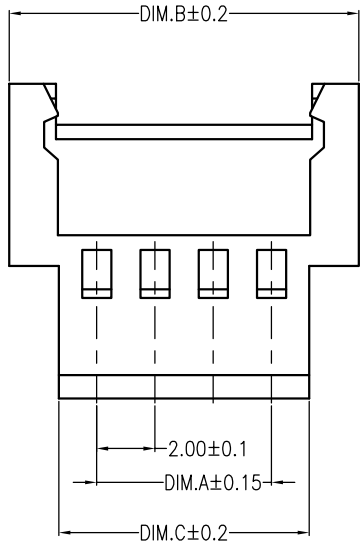
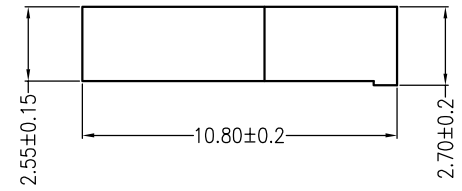


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.04.27




主要技术参数 Main Specifications

线 数 (Poles): 02 to 16
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 125V AC DC
 额定电流 (Rated current): 2.0A AC DC
 耐 电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range) : $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

C2001R-**-A5W-P		
PART No.	PACKAGING:	
No. OF CIRCUITS:	P=PE	
02~16	PLASTIC MATERIAL:	
	A5W=PA66 (White)	

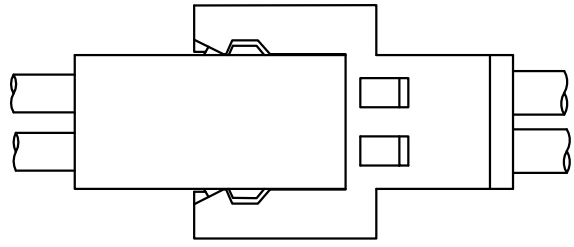

Assembly Layout

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	8.00	4.60
03	4.00	10.00	6.60
04	6.00	12.00	8.60
05	8.00	14.00	10.60
06	10.00	16.00	12.60
07	12.00	18.00	14.60
08	14.00	20.00	16.60
09	16.00	22.00	18.60
10	18.00	24.00	20.60
11	20.00	26.00	22.60
12	22.00	28.00	24.60
13	24.00	30.00	26.60
14	26.00	32.00	28.60
15	28.00	34.00	30.60
16	30.00	36.00	32.60

C				
B				
A	HOUSING	1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: C2001R 2.0mmPITCH Housing	
			PART NO.: C2001R-**-A5W-P	
X.±0.5 X.±5'			USE: CUSTOMER	
.X±0.3 .X±2'			APPD: 邵敬和	
.XX±0.25 .XX±1'			CHKD: 田峰	
---			DR: 吴丹平	
UNITS: mm			SCALE	SHEET
			1 : 1	1 / 1