

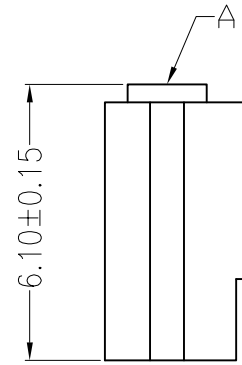
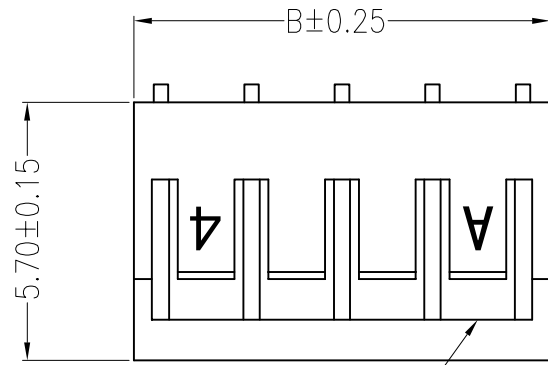


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	NEW RELEASE	吴丹平	2017.03.25

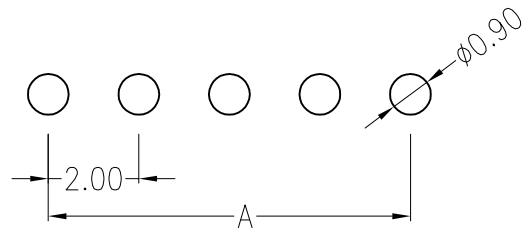

Circuit 1

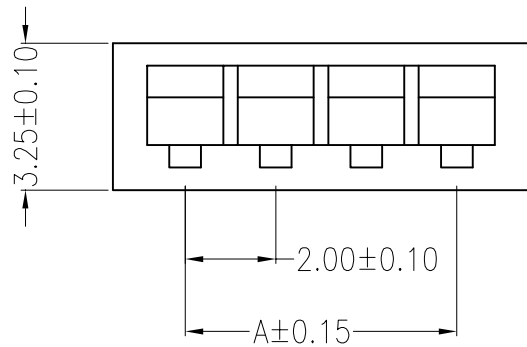

SUGGESTED PCB LAYOUT

Circuits	Dimensions (mm)	
	A	B
02	2.00	5.20
03	4.00	7.20
04	6.00	9.20
05	8.00	11.20
06	10.00	13.20
07	12.00	15.20
08	14.00	17.20
09	16.00	19.20
10	18.00	21.20
11	20.00	23.20
12	22.00	25.20
13	24.00	27.20

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 2.0A AC DC
 耐 电压 (Withstand Voltage): 800V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

B2001Y-**-A6W-P		
PART No.		PACKAGING: P=PE
No. OF CIRCUITS: 02~13		PLASTIC MATERIAL: A6W=PA66 (WHITE)

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	HOUSING	1 PCS	PA66	COLOR:WHITE
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.				
TITLE: B2001Y			2.00mm PITCH 180°HOUSING	
.X±0.35 X.±			USE: CUSTOMER	
.XX±0.25 .X±			APPD: 邵敬和	
.XXX±0.15 .XX±			CHKD: 田峰	
-- --			DR: 吴丹平	
UNITS: mm			SCALE 1 : 1	
			SHEET 1 / 1	