

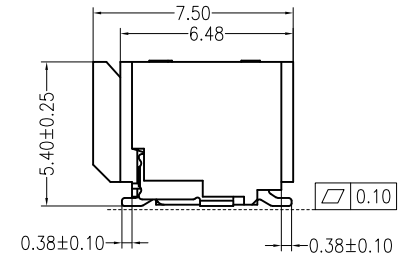
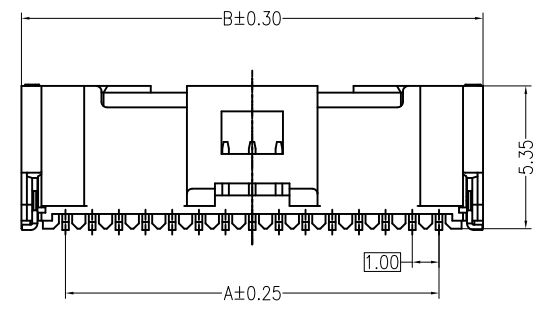
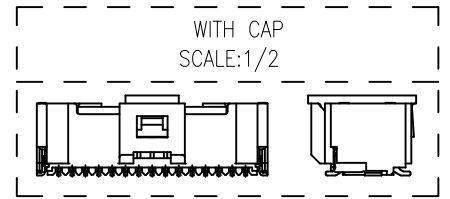
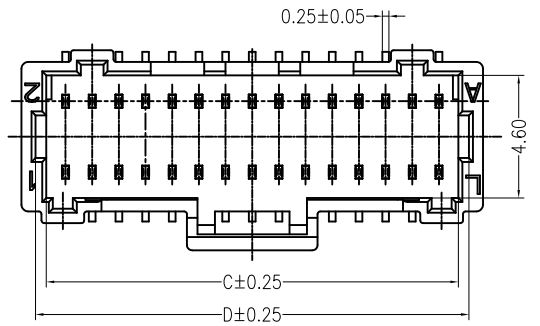
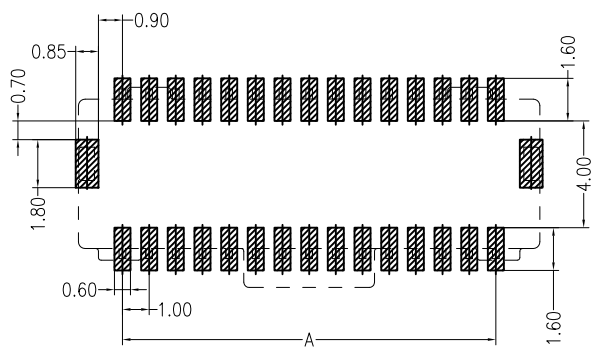



REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	FangSongLe	2020/09/23

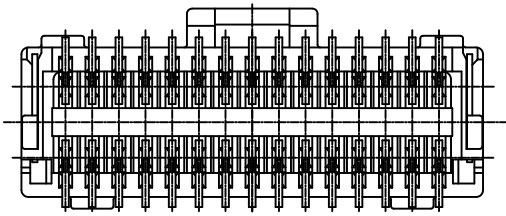

Specifications:
 Poles: 20 to 50
 Contact resistance: ≤20mΩ
 Insulation resistance: ≥100MΩ
 Rated voltage: 50V AC DC
 Rated current: 0.8A AC DC
 Withstand Voltage: 250V AC/minute
 Temperature Range: -25°C ~ +85°C
 Housing: PA9T UL94V-0, Natural
 Contacts: Phosphor Bronze / Gold-plated
 Solder tabs: Brass / MATTE Sn-plated
 Cap: PA9T UL94V-0, Natural

ORDER INFORMATION:

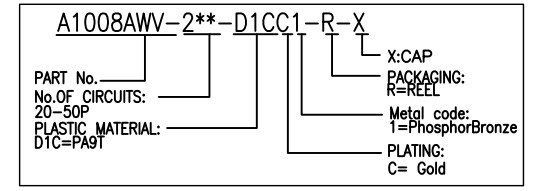

PCB LAYOUT (Tolerance: ±0.05)

PIN.	DIM A	DIM B	DIM C	DIM D
2x10P	9.00	12.30	10.45	11.25
2x15P	14.00	17.30	15.45	16.25
2x20P	19.00	22.30	20.45	21.25
2x25P	24.00	27.30	25.45	26.25

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 1.00 Pitch Wafer 180° SMT	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.:
X. ±0.50	X. ±5°	APPD: Liuzhengling	A1008AWV-2**-D1CC1-R-X
X.X ±0.30	X.X ±2°	CHKD: Steven	DWG NO.:
X.XX ±0.20	X.XX ±1°	DR: FangSongLe	JKUN-GCKH-0852
UNITS: mm		SCALE 1 : 1	SHEET 1 / 1