

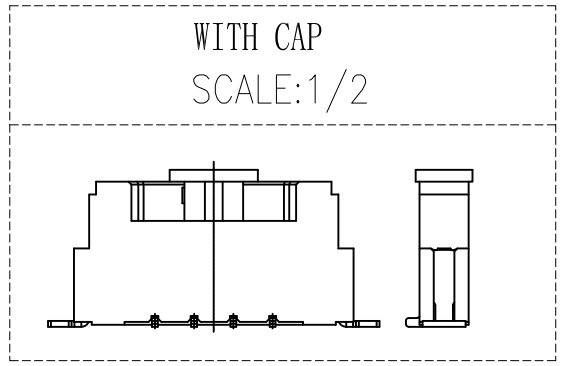
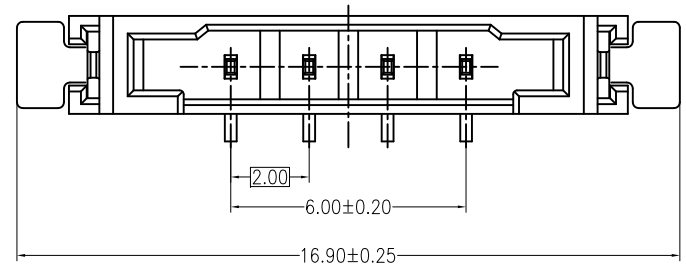


A B C D E F

REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	FangSongLe	2020/08/03

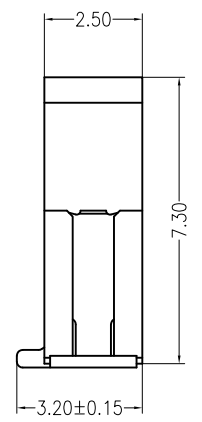


Specifications:
 Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 250V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^{\circ}C \sim +105^{\circ}C$
 Housing: LCP UL94V-0, BEIGE
 Contacts: PhosphorBronze/ Sn-plated

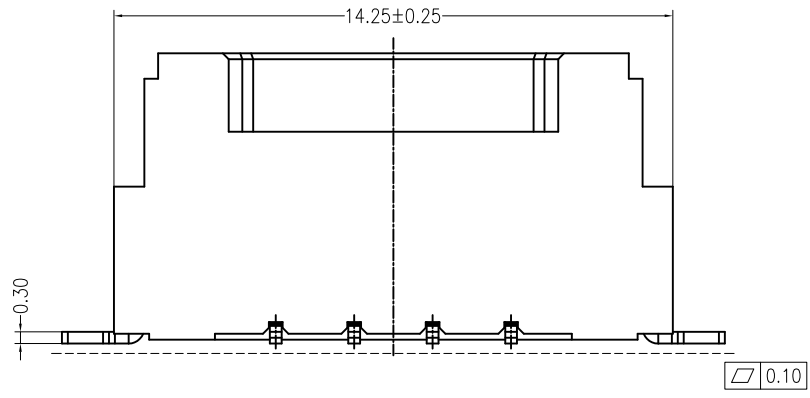



ORDER INFORMATION:

A2011AWV-04-F3MA1-R

PART No.:	A2011AWV-04-F3MA1-R	PACKAGING:	R=REEL
No. OF CIRCUITS:	04	Metal code:	1=PhosphorBronze
PLASTIC MATERIAL:	F3M=LCP (BEIGE)	PLATING:	A=Sn

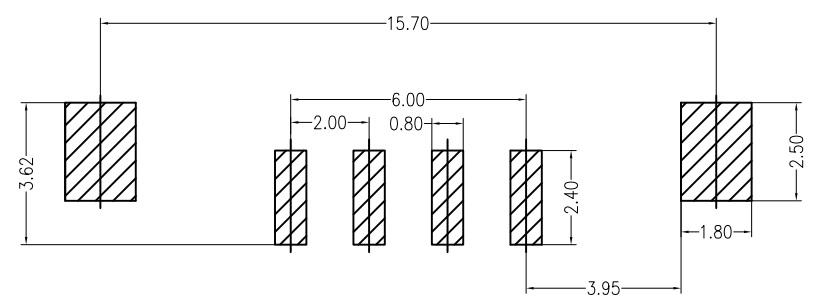

PCB Layout

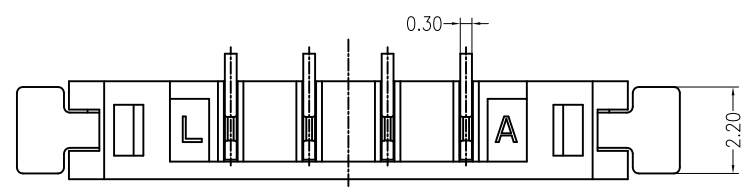

A B C D E F

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 2.00 Pitch Wafer180° SMT	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.:
X. ± 0.50	X. $\pm 5^{\circ}$	APPD: WangFeng	A2011AWV-04-F3MA1-R
X.X ± 0.30	X.X $\pm 2^{\circ}$	CHKD: Steven	DWG NO.:
X.XX ± 0.20	X.XX $\pm 1^{\circ}$	DR: FangSongLe	JKUN-GCKH-0857
UNITS: mm		SCALE 1 : 1	SHEET 1 / 1